

CL-300

MÁY ĐO TRÒNG TỰ ĐỘNG



 **TOPCON**

YOUR VISION. OUR FOCUS.

HAN VIET

Luôn đồng hành cùng bạn

CL-300 Computerized lensmeter

CL-300 Computerized lensmeter

With a UV measurement function, the CL-300 provides comprehensive data for the optometrists. Its compact, ergonomic design and intuitive color touch panel ensures that measurements can be easily and quickly obtained.

Features

- | LCD color touch panel
- | Compact slim body
- | Automatic mono- & multi-focal detection
- | UV transmittance measurement
- | Green measurement light beam





* UV Transmittance Measurement is performed with the light beam of 365 nm wavelength.

UV transmittance measurement function

The CL-300's UV measurement function provides information on the ultraviolet transmittance in the range of 0% to 100%, providing reliable measurement results for eyeglasses and sunglasses.



Multi-focal lens measurement


Not only single lenses but also multifocal lenses can be easily measured. The CL-300 also features automatic detection for single lenses, bi-focal and progressive lenses.

Example: Progressive lens measurement

The image shows a near point measurement screen. With simple operation, the ADD value can be obtained by following the guide instructed on this progressive measuring mode.

Green light beam

The CL-300 incorporates the green light reading beam, which is also known as e-line. Due to the wavelength of 546 nm, the e-line can be well-sensed by the human's eye and it is determined as a standard by ISO 7944.

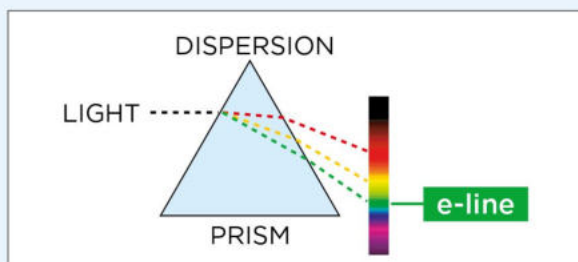

ABBE compensation is no longer required with this new ISO 7944 compliant feature. Using green light beam in our instrument enhances lens measurement precision and reduces the chance of error in the measurements.



CL-300 features


Improved lens support

Due to its design, the lens support of the CL-300 is 6 mm more in height compared to the conventional model. This change enables smooth and trouble-free measurement of high-curve lenses, preventing from contact of the lens edge with external parts of the lens support.



Large 5.7 inch LCD monitor with wider directional angle

The wide LCD monitor covers a 160° angle of observation allowing clear, compatible readings from virtually any position regardless of the operator's height.

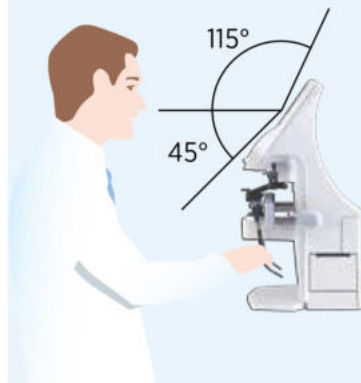

White ink cartridge standard

The featured white marking ink provides clear marking even on lenses with anti staining and anti fog coating. Due to these favorable qualities, Topcon made the white marking ink standard in the CL-300.



Models and marking ink

	white ink	red ink
Cartridge type	standard	optional
Holder type	-	standard

* For availability in your region and other details please refer to the local Topcon authorized representative.

Contact lens measurement

Contact lenses can be easily measured using the CL-300 lens support and ring accessories that come standard with the instrument.



Fast, easy drop in printer

Loading the thermal paper into the printer has never been easier. Just drop the printer paper into the receptacle and close the cover. The quick and quiet printer is ready to go. This saves time and enhances workflow.



Print out sample

TOPCON CL-300			
<R>	S	C	A
	+0.00	+0.00	180
ADD 0.75			
PSM	0.00	OUT	0.00
<L>	S	C	A
	+0.75	+0.25	85
ADD 0.75			
PSM	0.00	OUT	3.50 DWN
TOPCON Optical Store			

Easy operation

Easy and fast operation

The large, designed color LCD monitor with a 5.7 inch touch panel simplifies the interpretation of readings even with progressive and multi-focal

lenses. The dynamic color measuring graphics follow the measuring process and present each step of the operation with different color, providing better control and ease of use.



1

Smooth lens table support enables easy placement of eyeglasses.



2

Right after the lens is placed, the optical center (+) appears with the "BLUE" bar.



3

The "ALIGNMENT OK" is displayed when the target (+) comes within the circle. When BEEP function is ON, the buzzer will sound.



4


The measured data is memorized automatically with the "MARKING OK" when the target is aligned in the exact center (at $O\Delta$).

In order to do marking, place down the lens retainer to secure the lens and marking is stamped accurately with the equipped marking cartridge.

THÔNG SỐ KỸ THUẬT TOPCON CL300

Độ cầu	-25D ~ 25D (step 0,01 / 0,12 / 0,25D)
Trụ	0 ~ ± 10D (step 0,01 / 0,12 / 0,25D)
Trục	0 ~ 180 ° (1 °)
Addition	0 ~ 10D (step 0,01 / 0,12 / 0,25D)
Lăng kính	0 ~ 10 Δ
Kiểu trụ	MIX / - / +
Kiểu lăng kính	X-Y , P-B , Không hiển thị
Hệ số UV	0 - 100% (1% - 5% steps)
Chức năng dò tròng kính	Tự động
Bước sóng đèn LED	535nm
Nguồn sáng đèn	Led xanh 535±5nm Led UV 365±5nm
Đường kính tròng đo	ø 5 đến 100mm
Đo tròng kính	Các loại
Nguồn điện	100 ~ 240V 50-60Hz 1.2A (AC Adapter): Auto Power Save
Màn hình	Cảm ứng LCD 5.7 inch
Cổng kết nối	RS-232C × 2, LAN × 1 *
Kích thước	197x220x404mm
Khối lượng	3,8kg

System Chart

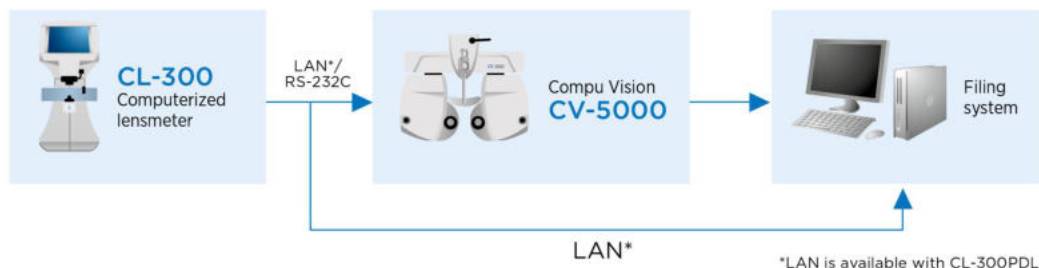

IMPORTANT

Subject to change in design and/or specifications without advanced notice.
In order to obtain the best results with this instrument, please be sure to review all user instructions prior to operation. Manufacturer: Topcon Corporation.

HAN VIET
Luôn đồng hành cùng bạn



Topcon Europe Medical B.V.
Essebaan 11; 2908 LJ Capelle a/d IJssel; P.O. Box 145;
2900 AC Capelle a/d IJssel; The Netherlands
Phone: +31-(0)10-4585077; Fax: +31-(0)10-4585045
E-mail: medical@topcon.eu; www.topcon-medical.eu

Topcon Denmark
Praestemarksvej 25; 4000 Roskilde, Denmark
Phone: +45-46-327500; Fax: +45-46-327555
E-mail: info@topcon.dk
www.topcon.dk

Topcon Scandinavia A.B.
Neogatan 2; P.O. Box 25; 43151 Mölndal, Sweden
Phone: +46-(0)31-7109200; Fax: +46-(0)31-7109249
E-mail: medical@topcon.se; www.topcon.se

Topcon España S.A.
HEAD OFFICE: Frederic Mompou, 4;
08960 Sant Just Desvern; Barcelona, Spain
Phone: +34-93-4734057; Fax: +34-93-4733932
E-mail: medica@topcon.es; www.topcon.es

Topcon Italy
Viale dell' Industria 60;
20037 Paderno Dugnano, (MI) Italy
Phone: +39-02-9186671; Fax: +39-02-91081091
E-mail: info@topcon.it; www.topcon.it

Topcon France
BAT A1; 3 route de la révolte, 93206 Saint Denis Cedex
Phone: +33-(0)1-49212323; Fax: +33-(0)1-49212324
E-mail: topcon@topcon.fr; www.topcon-medical.fr

Topcon Deutschland GmbH
Hanns-Martin-Schleyer Strasse 41;
D-47877 Willich, Germany
Phone: (+49) 2154-885-0; Fax: (+49) 2154-885-177
E-mail: info@topcon-medical.de; www.topcon-medical.de

Topcon Polska Sp. z o.o.
ul. Warszawska 23; 42-470 Siewierz; Poland
Phone: +48-(0)32-670-50-45; Fax: +48-(0)32-671-34-05
www.topcon-polska.pl

Topcon Great Britain Ltd.
Topcon House; Kennet Side; Bone Lane; Newbury
Berkshire RG14 5PX; United Kingdom
Phone: +44-(0)1635-551120; Fax: +44-(0)1635-551170
E-mail: medical@topcon.co.uk; www.topcon.co.uk

Topcon Ireland
Unit 276, Blanchardstown; Corporate Park 2
Ballycoolin; Dublin 15, Ireland
Phone: +353-18975900; Fax: +353-18293915
E-mail: medical@topcon.ie; www.topcon.ie



TOPCON CORPORATION

75-1 Hasunuma-cho, Itabashi-ku, Tokyo 174-8580, Japan.
Phone: 3-3558-2523/2522, Fax: 3-3960-4214, www.topcon.co.jp